APPROVED BY YOUR LOCAL BUILDING INSPECTOR OR STRUCTURAL ENGINEER.

DISCLAIMER: THIS PLAN IS NOT CONSIDERED COMPLETE UNLESS

BUILDER ACCEPTS ALL RESPONSIBILITY AND LIABILITY.

STAIRWAY ILLUMINATION: ALL EXTERIOR STAIRWAYS

SHALL BE ILLUMINATED AT THE TOP LANDING TO THE STAIRWAY. ILLUMINATION SHALL BE CONTROLLED FROM INSIDE THE DWELLING OR AUTOMATICALLY ACTIVATED.

DECKS.COM LLC, AND ASSOCIATED SPONSORS ACCEPT NO LIABILITY FOR THE USE OF THIS PLAN. -- 15'-- 10" --LEDGER BOARD HOUSE (see ledger board detail) INSTALL BRIDGING AT MID SPAN TOP DECK -5% DECK .4√



12" DIAMETER FOOTING



16" DIAMETER FOOTING





22" DIAMETER FOOTING

FOOTINGS TO BE INSTALLED TO PROPER DEPTH AS IS REQUIRED BY YOUR LOCAL BUILDING ORDINANCE

FROST FOOTINGS SIZES BASED ON 55 LB PER SQUARE FOOT TRIBUTARY LOADS APPLIED TO 1500 PSI SOIL COMPRESSION CAPACITY (ASSUMED CLAY SOIL)

SEE FOOTING DETAIL IN DECK CONSTRUCTION GUIDE. DISCLAIMER: ONLY USE #2 OR BETTER PRESSURE TREATED SOUTHERN YELLOW PINE 2 x 10 FOR FRAMING MATERIALS NEVER SUBSTITUTE COMPOSITE OR SOFTWOODS FOR FRAMING MATERIALS -2×10 SOUTHE " HIGH WITH L UILT MAX RISE

BE ဥ

2LM261

DECK PLAN REVERSE

VIEW

PLAN


EQUIVALENT FASTENERS

S.

BOLTS WITH WASHERS

 \sim

OPENINGS PER IRC CODE (see rail detail)
RISE 4" MIN RUN 10" PER IRC CODE (see detail)
OW MANUFACTURERS INSTALLATION INSTRUCTIONS)

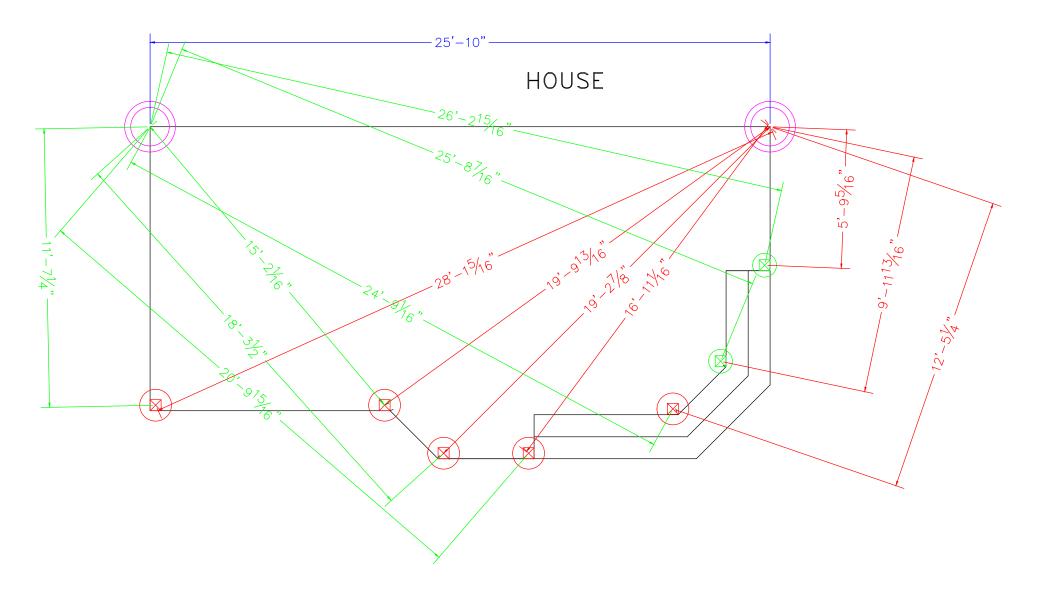

2

2LM2614P10

DECK PLAN REVERSE

FOOTING LAYOUT

 \boxtimes



DIAMETER FOOTING





THIS IS A TRIANGULATION REFERENCE POINT MEASURE TO THE CENTER OF YOUR FOOTINGS FROM THESE POINTS.

> DISCLAIMER: USE ONLY 2,500 PSI CONCRETE FOR FROST FOOTING FOUNDATIONS