


APPROVED BY YOUR LOCAL BUILDING INSPECTOR OR STRUCTURAL ENGINEER.

DISCLAIMER: THIS PLAN IS NOT CONSIDERED COMPLETE UNLESS



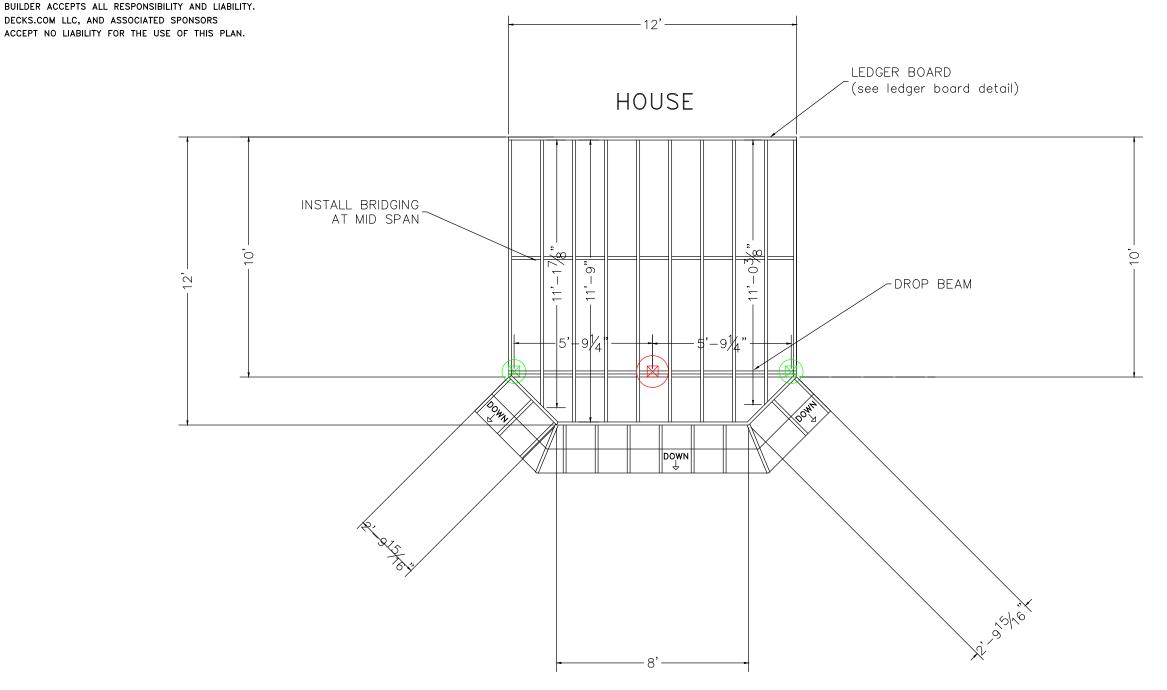

12" DIAMETER FOOTING



16" DIAMETER FOOTING



FROST FOOTINGS SIZES BASED ON 55 LB PER SQUARE FOOT TRIBUTARY LOADS APPLIED TO 1500 PSI SOIL COMPRESSION CAPACITY (ASSUMED CLAY SOIL)

22" DIAMETER FOOTING

SEE FOOTING DETAIL IN DECK CONSTRUCTION GUIDE.

FOOTINGS TO BE INSTALLED TO PROPER DEPTH AS IS REQUIRED BY YOUR LOCAL

BUILDING ORDINANCE

DISCLAIMER: ONLY USE #2 OR BETTER PRESSURE TREATED SOUTHERN YELLOW PINE 2 x 10 FOR FRAMING MATERIALS NEVER SUBSTITUTE COMPOSITE OR SOFTWOODS FOR FRAMING MATERIALS



7

21 1LV1

PLAN

DECK

VIEW

PLAN

OR EQUIVALENT FASTENERS

BOLTS WITH WASHERS

 \sim

INE TREATED NAILED
OPENINGS PER IRC CODE (see rail detail)
RISE 4" MIN RUN 10" PER IRC CODE (see detail)
OW MANUFACTURERS INSTALLATION INSTRUCTIONS)

2×10 SOUTHERN Y 2-2×10 SOUTHERN 36" HIGH WITH LE. BUILT MAX RISE 7

BE ဥ

DECK PLAN 1LV1212

FOOTING LAYOUT

3



12" DIAMETER FOOTING







THIS IS A TRIANGULATION REFERENCE POINT MEASURE TO THE CENTER OF YOUR FOOTINGS FROM THESE POINTS.

DISCLAIMER: USE ONLY 2,500 PSI CONCRETE

FOR FROST FOOTING FOUNDATIONS