


STAIRWAY ILLUMINATION: ALL EXTERIOR STAIRWAYS
SHALL BE ILLUMINATED AT THE TOP LANDING TO
THE STAIRWAY. ILLUMINATION SHALL BE CONTROLLED
FROM INSIDE THE DWELLING OR AUTOMATICALLY
ACTIVATED.

DISCLAIMER: THIS PLAN IS NOT CONSIDERED COMPLETE UNLESS APPROVED BY YOUR LOCAL BUILDING INSPECTOR OR STRUCTURAL ENGINEER. BUILDER ACCEPTS ALL RESPONSIBILITY AND LABILITY. DECKS.COM LLC, AND ASSOCIATED SPONSORS ACCEPT NO LIABILITY FOR THE USE OF THIS PLAN.

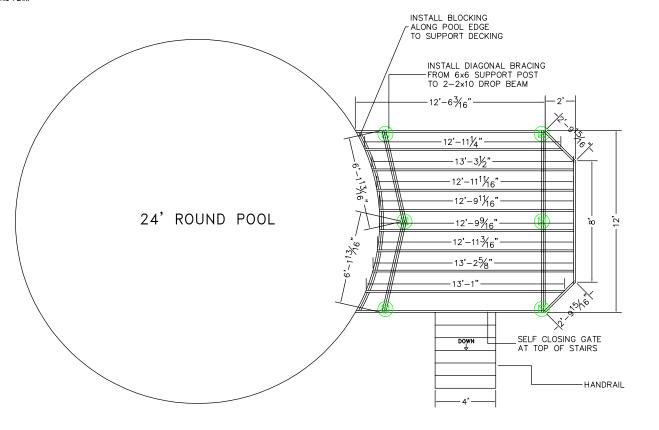

12" DIAMETER FOOTING

16" DIAMETER FOOTING

22" DIAMETER FOOTING

FOOTINGS TO BE INSTALLED TO PROPER DEPTIH AS IS REQUIRED BY YOUR LOCAL BUILDING ORDINANCE FROST FOOTINGS SIZES BASED ON 55 LB PER SQUARE FOOT TRIBUTARY LOADS APPLIED TO 1500 PSI SOIL COMPRESSION CAPACITY (ASSUMED CLAY SOIL)

SEE FOOTING DETAIL IN DECK CONSTRUCTION GUIDE.

DISCLAIMER: ONLY USE #2 OR BETTER PRESSURE TREATED
SOUTHERN YELLOW PINE 2 x 10 FOR FRAMING MATERIALS
NEVER SUBSTITUTE COMPOSITE OR SOFTWOODS FOR FRAMING MATERIALS

OUTHERN YELLOW PINE TREATED 16" ON CENTER
1 SOUTHERN YELLOW PINE TREATED MAILED
1 WITH LESS THAN 4" OPENINGS PER INC CODE (see rail detail)
1 MAT RISE 7 3/4" MIN RISE 4" MIN RUN 10" PER INC CODE (see
1 MAN PART PER 10" PER INSTALLATION INSTRUCT

5 6 6 8

BE CORROSION

2

1214

VIEW DECK

PLAN POOL

 $\sim$ 

SCALE: 1/4" = 1' WHEN PRINTED ON 11x17 PAPER BASED ON THE INTERNATIONAL RESIDENTIAL CODE POOL DECK 1214 FOOTING LAYOUT 24' ROUND POOL 12" DIAMETER FOOTING  $\boxtimes$ DISCLAIMER: USE ONLY 2,500 PSI CONCRETE FOR FROST FOOTING FOUNDATIONS DISCLAIMER: THIS PLAN IS NOT CONSIDERED COMPLETE UNLESS APPROVED BY YOUR LOCAL BUILDING INSPECTOR OR STRUCTURAL ENGINEER. BUILDER ACCEPTS ALL RESPONSIBILITY AND LIABILITY. DECKS.COM LLC, AND ASSOCIATED SPONSORS ACCEPT NO LIABILITY FOR THE USE OF THIS PLAN.