


DISCLAIMER: THIS PLAN IS NOT CONSIDERED COMPLETE UNLESS APPROVED BY YOUR LOCAL BUILDING INSPECTOR OR STRUCTURAL ENGINEER. BUILDER ACCEPTS ALL RESPONSIBILITY AND LIABILITY. DECKS.COM LLC, AND ASSOCIATED SPONSORS ACCEPT NO LIABILITY FOR THE USE OF THIS PLAN.

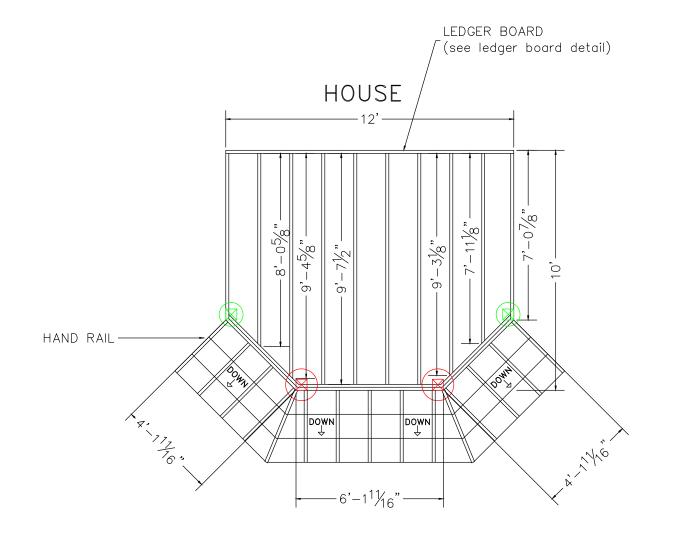

 $\sim$ OR EQUIVALENT FASTENERS OW PINE TREATED NAILED

N 4" OPENINGS PER IRC CODE (see rail detail)

MIN RISE 4" MIN RUN 10" PER IRC CODE (see detail)

(FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS) BOLTS WITH WASHERS \* DETAIL IN DECK CO BE 2×10 SOUTHERN N E 2-2×10 SOUTHERN 36" HIGH WITH LEST BE BUILT MAX RISE 7

CORROSION

BE

ဥ

1LD1210

PLAN

DECK

VIEW

PLAN

12" DIAMETER FOOTING

 $\boxtimes$ 

16" DIAMETER FOOTING

 $\boxtimes$ 22" DIAMETER FOOTING FROST FOOTINGS SIZES BASED ON 55 LB PER SQUARE FOOT TRIBUTARY LOADS APPLIED TO 1500 PSI SOIL COMPRESSION CAPACITY (ASSUMED CLAY SOIL) SEE FOOTING DETAIL IN DECK CONSTRUCTION GUIDE.

FOOTINGS TO BE INSTALLED TO PROPER DEPTH AS IS REQUIRED BY YOUR LOCAL

BUILDING ORDINANCE

DISCLAIMER: ONLY USE #2 OR BETTER PRESSURE TREATED SOUTHERN YELLOW PINE 2 x 10 FOR FRAMING MATERIALS NEVER SUBSTITUTE COMPOSITE OR SOFTWOODS FOR FRAMING MATERIALS

THIS IS A TRIANGULATION REFERENCE POINT MEASURE TO THE CENTER OF YOUR FOOTINGS

FROM THESE POINTS.

DISCLAIMER: USE ONLY 2,500 PSI CONCRETE FOR FROST FOOTING FOUNDATIONS FOOTING LAYOUT
DECK PLAN 1LD1210

(N)

REQUIRED BY YOUR LOCAL
BUILDING ORDINANCE
FROST FOOTINGS SIZES BASED
ON 55 LB PER SQUARE FOOT
TRIBUTARY LOADS APPLIED TO

DIAMETER FOOTING

16" DIAN



12" DIAMETER FOOTING



